

AD-A162 877


METEOROLOGICAL RANGE SUPPORT REQUIREMENTS AND
IMPLICATIONS FOR THE FUTURE OF SHUTTLE OPERATIONS(U)
EASTERN SPACE AND MISSILE CENTER PATRICK AFB FL
E F KOLCZYNSKI ET AL 1985 ESMC-TR-85-05 F/G 4/2

1/1

UNCLASSIFIED

NL





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

AD-A162 877

⑦

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED/UNLIMITED			1b. RESTRICTIVE MARKINGS NONE		
2a. SECURITY CLASSIFICATION AUTHORITY N/A			3. DISTRIBUTION/AVAILABILITY OF REPORT "A"		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE N/A					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) ESMC-TR-85-05			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION EASTERN SPACE AND MISSILE CENTER (ESMC)		6b. OFFICE SYMBOL (If applicable) WE	7a. NAME OF MONITORING ORGANIZATION DTIC ELECTE DEC 31 1985		
6c. ADDRESS (City, State and ZIP Code) ESMC/WE PATRICK AIR FORCE BASE, FL 32925			7b. ADDRESS (City, State and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION EASTERN SPACE AND MISSILE CENTER		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N/A		
8c. ADDRESS (City, State and ZIP Code)			10. SOURCE OF FUNDING NOS.		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
11. TITLE (Include Security Classification) Meteorological Range Support Requirements and Implications for the Future of Shuttle Operations			WORK UNIT NO.		
12. PERSONAL AUTHOR(S) Edward F. Kolczynski and Billie F. Boyd					
13a. TYPE OF REPORT Progress		13b. TIME COVERED FROM 1984 TO 1985		14. DATE OF REPORT (Yr., Mo., Day)	
				15. PAGE COUNT 5	
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB. GR.	Weather Forecasting; Space Shuttle, Missile Launches, Weather Sensitivities		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) The addition of a landing facility at the Kennedy Space Center (KSC) and an increased launch rate for the Space Shuttle required a significant change in meteorological requirements. The joint USAF-NASA efforts for improved support are discussed, including past efforts and future plans. Meteorological constraints to Shuttle operations are presented, forecasting benefits of the various systems are reviewed and weather impacts on specific missions are discussed.					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input type="checkbox"/>			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE INDIVIDUAL Edward F. Kolczynski, Lt Col, USAF			22b. TELEPHONE NUMBER (Include Area Code) 305-494-7426		22c. OFFICE SYMBOL WE

INSTRUCTIONS FOR PREPARATION OF REPORT DOCUMENTATION PAGE

GENERAL INFORMATION

The accuracy and completeness of all information provided in the DD Form 1473, especially classification and distribution limitation markings, are the responsibility of the authoring or monitoring DoD activity.

Because the data input on this form will be what others will retrieve from DTIC's bibliographic data base or may determine how the document can be accessed by future users, care should be taken to have the form completed by knowledgeable personnel. For better communication and to facilitate more complete and accurate input from the origination of the form to those processing the data, space has been provided for the name, telephone number and office symbol of the DoD person responsible for the input cited on the form. These are to be noted in Block 22.

All information on the DD Form 1473 should be typed.

Only information appearing on or in the report, or applying specifically to the report in hand should be reported. If there is any doubt, the block should be left blank.

Some of the information on the forms (e.g., title, abstract) will be machine-indexed. The terminology used should describe the content of the report or identify it as precisely as possible for future identification and retrieval.

SPECIAL NOTE: UNCLASSIFIED ABSTRACTS AND TITLES DESCRIBING CLASSIFIED DOCUMENTS MAY APPEAR SEPARATELY FROM THE DOCUMENTS IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT BULLETINS AND BIBLIOGRAPHIES OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE RDT/E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS AND TITLES.

The Defense Technical Information Center (DTIC) is ready to offer assistance to anyone who needs and requests it. Call Data Base Input Division (AUTOVON) 284-7044; Com 202-274-7044.

SPECIFIC BLOCKS

SECURITY CLASSIFICATION OF THE FORM:

In accordance with DoD 5200.1-R, Information Security Program Regulation, Chapter V1 Section 2, paragraph 4-200, classification markings are to be stamped, printed, or written at the tops and bottom of the form in capital letters that are larger than those used in the text of the document. See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Section II, paragraph 11a(2). This form should be nonclassified, if possible.

Block 1.a. Report Security Classification: Designate the highest security classification of the report. (See DoD 5200.00.1-R, Chapters, I, IV, VII, XI, Appendix A).

Block 1.b. Enter the restricted marking or warning notice of the report (e.g., CNWDI, RD, NATO).

Block 2.a. Security Classification Authority: Enter the commonly used markings in accordance with DoD 5200.1-R, Chapter IV, Section 4, paragraph 4-400 and 4-402. Indicate classification authority.

Block 2.b. Declassification/Downgrading Schedule: Indicate specific date or event for declassification or the notation "Originating Agency Determination Required" or "OADR." Also insert (when applicable) downgrade to: _____ on _____, (e.g., "Downgrade to Confidential on 6 July 1983"). (See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Appendix II).

NOTE: Entry must be made in Blocks 2.a. and 2.b. except when the original report is unclassified and has never been upgraded.

Block 3. Distribution/Availability Statement of Report: Insert the statement as it appears on the report. If a limited distribution statement is used, the reason must be one of those given by DoD Directive 5200.20, Distribution Statements on Technical Documents. The Distribution Statement should provide for the broadest distribution possible within limits of security and controlling office limitations.

Block 4. Performing Organization Report Number(s): Enter the unique alphanumeric report number(s) assigned by the organization originating or generating the report from its research and whose name appears in Block 6. These numbers should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Performing Organization is also the Monitoring Agency, enter the report number in Block 4.

Block 5. Monitoring Organization Report Number(s): Enter the unique alphanumeric report number(s) assigned by the Monitoring Agency. This should be a number assigned by a Department of Defense or other government agency and should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Monitoring Agency is the same as the Performing Organization enter the report number in Block 4 and leave Block 5 blank.

Block 6.a. Performing Organization: For in-house reports, enter the name of the performing activity. For reports prepared under contract or grant, enter the contractor or the grantee who generated the report and identify the appropriate corporate division, school, laboratory, etc., of the author.

Block 6.b. Enter the office symbol of the performing organization.

Block 6.c. Enter the address of the performing organization, list city, state and ZIP code.

Block 7.a. Monitoring Organization - Name: This is the agency responsible for administering or monitoring a project, contract, or grant. If the monitor is also the performing organization, leave Block 7.a. blank. In the case of joint sponsorship, the monitoring organization is determined by advanced agreement. It can be either an office, a group, or a committee representing more than one activity, service or agency.

Block 7.b. Enter the address of the monitoring organization. Include city, state and ZIP code.

Block 8.a. Funding (*Sponsoring*) Organization — Name: Enter the full official name of the organization under whose immediate funding the document was generated, whether the work was one in-house or by contract. If the Monitoring Organization is the same as the Funding Organization, leave Block 8.a. blank.

Block 8.b. Enter the office symbol of the Funding (*Sponsoring*) Organization.

Block 8.c. Enter the address of the Funding (*Sponsoring*) Organization. Include city, state and ZIP code.

Block 9. Procurement Instrument Identification Number (*Contract, Grant, or other Funding Instrument*): For a contractor or grantee report, enter the complete contract or grant number(s) under which the work was accomplished. Leave this block blank for in-house reports.

Block 10. Source of Funding (*Program Element, Project, Task Area, and Work Unit Number(s)*): These four data elements relate to the DoD budget structure and provide program and/or administrative identification of the source of support for the work being carried on. Enter the program element, project, task area, work unit number, or their equivalents that identify the principal source of funding for the work required. These codes may be obtained from the applicable DoD forms such as the DD Form 1498 (*Research and Technology Work Unit Summary*) or from the fund citation of the funding instrument. If this information is not available to the authoring activity, these blocks should be filled in by the responsible DoD Official designated in Block 22. If the report is funded from multiple sources, identify only the Program Element and the Project, Task Area and Work Unit Numbers of the principal contributor.

Block 11. Title and Its Security Classification: Enter the title in Block 11 in initial capital letters exactly as it appears on the report. Titles on all classified reports, whether classified or unclassified, must be immediately followed by the security classification of the title enclosed in parentheses. A report with a classified title should be provided with an unclassified version if it is possible to do so without changing the meaning or obscuring the contents of the report. Use specific, meaningful words that describe the content of the report so that when the title is machine-indexed, the words will contribute useful retrieval terms.

If the report is in a foreign language and the title is given in both English and a foreign language, list the foreign language title first, followed by the English title enclosed in parentheses. If part of the text is in English, list the English title first followed by the foreign language title enclosed in parentheses. If the title is given in more than one foreign language, use a title that reflects the language of the text. If both the text and titles are in a foreign language, the title should be translated, if possible, unless the title is also the name of a foreign periodical. Transliterations of often used foreign alphabets (*see Appendix A of MIL-STD-847B*) are available from DTIC in document AD-A080 800.

Block 12. Personal Author(s): Give the complete name(s) of the author(s) in this order: last name, first name and middle name. In addition, list the affiliation of the authors if it differs from that of the performing organization.

List all authors. If the document is a compilation of papers, it may be more useful to list the authors with the titles of their papers as a contents note in the abstract in Block 19. If appropriate, the names of editors and compilers may be entered in this block.

Block 13.a. Type of Report: Indicate whether the report is summary, final, annual, progress, interim, etc.

Block 13.b. Period of Time Covered: Enter the inclusive dates (*year, month, day*) of the period covered, such as the life of a contract in a final contractor report.

Block 14. Date of Report: Enter the year, month, and day, or the year and the month the report was issued as shown on the cover.

Block 15. Page Count: Enter the total number of pages in the report that contain information, including cover, preface, table of contents, distribution lists, partial pages, etc. A chart in the body of the report is counted even if it is unnumbered.

Block 16. Supplementary Notation: Enter useful information about the report in hand, such as: "Prepared in cooperation with . . ." "Translation at (or by) . . ." "Symposium . . ." If there are report numbers for the report which are not noted elsewhere on the form (*such as internal series numbers or participating organization report numbers*) enter in this block.

Block 17. COSATI Codes: This block provides the subject coverage of the report for announcement and distribution purposes. The categories are to be taken from the "COSATI Subject Category List" (*DoD Modified*), Oct 65, AD-624 000. A copy is available on request to any organization generating reports for the DoD. At least one entry is required as follows:

Field — to indicate subject coverage of report.

Group — to indicate greater subject specificity of information in the report.

Sub-Group — if specificity greater than that shown by Group is required, use further designation as the numbers after the period (.) in the Group breakdown. Use only the designation provided by AD-624 000.

Example: The subject "Solid Rocket Motors" is Field 21, Group 08, Subgroup 2 page 32, AD-624 000).

Block 18. Subject Terms: These may be descriptors, keywords, posting terms, identifiers, open-ended terms, subject headings, acronyms, code words, or any words or phrases that identify the principal subjects covered in the report, that conform to standard terminology and exact enough to be used as subject index entries. Certain acronyms or "buzz words" may be used if they are recognized by specialists in the field and have a potential for becoming accepted terms. "Laser" and "Reverse Osmosis" were once such terms.

If possible, this set of terms should be selected so that the terms individually and as a group will remain UNCLASSIFIED without losing meaning. However, priority must be given to specifying proper subject terms rather than making the set of terms appear "UNCLASSIFIED". Each term on classified reports must be immediately followed by its security classification, enclosed in parentheses.

For reference on standard terminology the "DTIC Retrieval and Indexing Terminology" DRIT-1979, AD-A068 500, and the DoD "Thesaurus of Engineering and Scientific Terms (TEST) 1968, AD-672 000, may be useful.

Block 19. Abstract: The abstract should be a pithy, brief (*preferably not to exceed 300 words*) factual summary of the most significant information contained in the report. However, since the abstract may be machine-searched, all specific and meaningful words and phrases which express the subject content of the report should be included, even if the word limit is exceeded.

If possible the abstract of a classified report should be unclassified and consist of publicly releasable information (*Unlimited*); but in no instance should the report content description be sacrificed for the security classification.

NOTE: AN UNCLASSIFIED ABSTRACT DESCRIBING A CLASSIFIED DOCUMENT MAY APPEAR SEPARATELY FROM THE DOCUMENT IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT OR BIBLIOGRAPHIC PRODUCTS OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE DEFENSE RDT&E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS.

For further information on preparing abstracts, employing scientific symbols, verbalizing, etc., see paragraph 2.1(n) and 2.3(b) in MIL-STD-847B.


Block 20. Distribution/Availability of Abstract: This block must be completed for all reports. Check the applicable statement either "unclassified/unlimited" or "same as report," or if the report is available to DTIC registered users "Abstract available to DTIC users."

Block 21. Abstract Security Classification: To ensure proper safeguarding of information, this block must be completed for all reports to designate the classification level of the entire abstract. For CLASSIFIED abstracts, each paragraph must be preceded by its security classification code in parentheses.

Blocks 22.a.b.c. Give name, telephone number and office symbol respectively of DoD person responsible for the accuracy of the completion of this form.

METEOROLOGICAL RANGE SUPPORT REQUIREMENTS AND IMPLICATIONS
FOR THE FUTURE OF SHUTTLE OPERATIONS

Edward F. Kolczynski, Thomas M. Myers and Billie F. Boyd
Office of the Staff Meteorologist
Eastern Space and Missile Center
Patrick Air Force Base, FL



ABSTRACT

The addition of a landing facility at the Kennedy Space Center (KSC) and an increased launch rate for the Space Shuttle required a significant change in meteorological requirements. The joint USAF-NASA efforts for improved support are discussed, including past efforts and future plans. Meteorological constraints to Shuttle operations are presented, forecasting benefits of the various systems are reviewed and weather impacts on specific missions are discussed.

BACKGROUND

As the Shuttle hardware and operations mature, system turnaround time will increase to a rate of two launches per month (Table 1).

TABLE 1

Projected Shuttle Launches by Year

<u>YEAR</u>	<u>TOTAL LAUNCHES</u>
1985	10
1986	17
1987	23*
1988	24*

*Includes 4 each year at Vandenberg AFB.

With the projected schedule, it was evident that weather and weather support would become critical elements in achieving and maintaining this high launch rate. To deal with this problem, NASA and the USAF formed a joint Meteorological System Modernization Program (MSMP). This group is co-chaired by Technology Projects Office of Kennedy Space Center (NASA) and the Office of the Staff Meteorologist, Eastern Space and Missile Center (USAF). The purpose of this group is to upgrade the in-place forecast technology to ensure the challenges of Shuttle weather support are met. Several systems were investigated as the primary technology for the needed upgrade. Among those considered were the Satellite Data Handling System (SDHS) at the Air Force Global Weather Central, the Integrated Meteorological Processing System (IMPS) at the Western Test Range, the Automated Forecast and Observing System (AFOS) of the National Weather Service, the Prototype Regional Observing and Forecasting Service (PROFS) being

developed by NOAA at Boulder, Colorado, and the Man-computer Interactive Data Access System (McIDAS) of the Space and Science Engineering Center (SSEC) at the University of Wisconsin. The review of these systems led to a contract with SSEC to develop a Meteorological Interactive Data Display System (MIDDS) as the core of the upgraded meteorological support system. The MIDDS provides the rapid data integration, display, and analysis capabilities needed to provide high quality forecasts to the Shuttle and the Eastern Test Range. It also provides a system that can be upgraded easily and inexpensively for future needs. Along with the MIDDS installation, the MSMP is also upgrading weather data inputs to MIDDS as follows:

a. Installed a new WSR-74C 5cm wavelength weather radar. This system detects precipitation rates as low as .01 in/hr and assists in preventing a launch through showers which would cause rain droplet erosion of Shuttle thermal protection system tiles.

b. Expanded the system of meteorological wind towers on the range (originally used primarily for toxic diffusion forecasts). The additional tower data will be processed in a new model that identifies small scale wind features likely to trigger or enhance thunderstorm formation.

c. Upgraded the lightning location system which is used to detect and pinpoint the location of cloud-to-ground lightning strikes. This enhances the safety of Shuttle external tank fueling operations as well as the safety of crews working on gantries.

d. Will add a processor to the WSR-74C weather radar to plot vertical and horizontal cross sections of the atmosphere. This will enable forecasters to see if the Shuttle launch or final approach flight path intersects storm cells.

e. Added a Geostationary Operational Environmental Satellite (GOES) receiver system to the Cape Canaveral Forecast Facility (CCFF). This allows faster receipt of GOES data versus the previous method of receiving 20-30 minute old data via land-line sources. The in-house antenna system also adds the capability to receive 5 minute rapid-scan weather satellite photos during launch and landing operations.

SHUTTLE WEATHER CONSTRAINTS

As Shuttle operations mature and the launch rate increases, weather and weather forecast accuracy will become two primary factors affecting Shuttle system scheduling and efficiency. As shown in Table 2, weather impacts nearly all facets of Shuttle operations from rollover and rollout to final recovery of the Shuttle at end of mission. This table clearly illustrates the sensitivity of Shuttle operations to the environment and the subsequent impact of forecast support in maintaining Shuttle launch schedules. Table 3 lists weather impacts on previous Shuttle missions flown to date.

TABLE 2

STS WEATHER SENSITIVITIES

Temperature, Winds, Precipitation

Temperature less than 31°F or greater than 99°F.

Precipitation forecast or occurring from the start of external tank loading through launch.

Ice accumulation greater than 1/16 inch on the external tank.

Surface winds (measured at 60 feet above natural grade) greater than 34.4 knots (peak) or 22.6 knots (steady state) from all azimuths (lift off).

Prelaunch surface winds greater than 49 knots steady state while on the pad.

Upper air wind shears outside vehicle load limits.

Flightpath (Nominal or RTLS) Severe Weather Constraints (to protect the vehicle from lightning strikes)

Cannot be within 2NM above or 5NM horizontal distance of the anvil associated with a thunderstorm.

Cannot be through any cloud (convective or layered) from which precipitation (including virga) is observed.

Cannot be through clouds in the dissipating stage which have detected lightning by the electric field mill network within 15 minutes prior to launch.

Cannot be through any cloud if a 1000 volt per meter or greater ground level electric field contour encompasses launch (or landing) site.

Offshore Crew Recovery Area Constraints (from launch pad to 50NM in the Atlantic)

Surface wind greater than 25 knots.

Ceiling less than 500 feet.

Visibility less than 0.5NM.

Seas greater than 8 feet.

Solid Rocket Booster (SRB) Recovery Area Constraints

Sea state greater than sea state code 3 (3-5 foot moderate waves).

Visibility less than 1.5NM.

Landing (Return to Launch Site and End of Mission) Constraints

Ceiling less than 10,000 feet (8,000 feet if Microwave Landing System (MLS) available).

Visibility less than 7 miles (5 miles if MLS). Final launch decision relies on slant range evaluation by weather reconnaissance flights along the return to launch site path at KSC and reentry profile at Edwards AFB or White Sands.

Surface wind component (including max gusts) greater than 25 knots headwind, 20 knots crosswind (lakebed), 15 knots crosswind (runway), 10 knots crosswind (EOM), or 10 knots tailwind.

Any precipitation (RTLS), or precipitation within 50NM (EOM at KSC).

Turbulence greater than light to moderate.

Range Safety Constraints

The ESMC Office of Range Safety also has restrictions under the following weather conditions, due to tracking and blast damage considerations:

Ceiling less than 1,600 feet.

Visibility less than 5 miles.

Blast due to destruct sequence resulting in predicted fatality probability values greater than one per-hundred thousand will result in hold or scrub.

Shuttle Ferry Flight (Edwards AFB to KSC)

If the Shuttle lands at Edward AFB instead of the Kennedy Space Center, the following weather constraints apply to the return flight of the NASA B-747 Shuttle Carrier Aircraft:

Flight conducted daylight hours only.

No flight through visible moisture.

Flight level temperature must be greater than 15°F.

No turbulence greater than moderate.

Crosswinds must be less than 15 knots for takeoff and landing.

Take off runway ambient air temperature must be less than 92°F.

Accession For	
NTIS	<input checked="" type="checkbox"/>
CRA&I	<input type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



TABLE 3
WEATHER IMPACTS ON SHUTTLE FLIGHTS THROUGH
15 OCT 85

<u>Mission</u>	<u>Weather Impact</u>
STS-3 22-30 Mar 82	Landing site changes to White Sands Space Harbor because of standing water on Edwards AFB dry lakebed. Landing further delayed one day due to high winds at White Sands.
STS-7 18-24 Jun 83	Landing scheduled for KSC diverted to Edwards AFB due to unacceptable weather (ceiling and rainshowers) at the KSC Shuttle Landing Facility.
STS-8 30 Aug- 5 Sep 83	Launch delayed 17 minutes due to the presence of thundershower activity at KSC.
STS-41C 6-13 Apr 84	KSC landing diverted to Edwards AFB due to forecast weather conditions (cloud cover) being below acceptable landing limits at the Shuttle Landing Facility.
STS-41D 30 Aug- 5 Sep 84	Return to KSC from Edwards AFB via Shuttle Carrier Aircraft delayed one day due to strong winds at KSC landing facility caused by Tropical Storm Diana.
STS-51A 8-16 Nov 84	Launch delayed one day due to strong upper air wind shears at KSC.
STS-51C 24-27 Jan 85	Temperatures below freezing were impacting external tank cryogenic loading.
STS-51D 12-17 Apr 85	Held to end of launch window by broken to overcast clouds over launch site.
STS-51D 12-17 Apr 85	Landing delayed one additional orbit due to isolated showers moving across KSC. Winds were at the crosswind limit during landing at KSC.
STS-51I 27 Aug 85- 3 Sep 85	Launch scheduled for 24 Aug delayed 24 hours due to electrically active convective clouds in launch area.

SYSTEM CONFIGURATION

The MIDDS system is shown in Fig. 1. The full system configuration, including operational redundancy, will be in place by summer 1986.

FORECASTING BENEFITS OF THE SYSTEM

The following benefits result from the display and analysis capabilities of the MIDDS:

a. The local GOES earth station provides forecasters with near real time high resolution METSAT data, vice the 30 minute old data previously available via land facsimile network.

b. MIDDS enables the forecaster to do three-dimensional analysis of weather systems by using visual and infrared (IR) METSAT data.

c. Image enhancement and extended photo loops allow forecasters to time system development and movement more accurately.

d. With MIDDS, the forecasters are able to superimpose data sets to more easily evaluate the total impact of all parameters.

e. The MIDDS enhances forecaster productivity by providing rapid machine generated products and allows analysis of the weather situation instead of doing manual plots and hand analyses of data.

f. Most importantly, the MIDDS has greatly enhanced the confidence of our customers in the use of our forecasts. The ability to disseminate MIDDS output via closed circuit TV to system operators helps us to explain both our forecast reasoning and the current weather trends and thus bolsters the confidence of management in applying our forecasts in the launch and recovery decision process. To fully understand this, you need only place yourself in the situation of a launch director trying to make a decision based on a forecast using a hard copy, 30 minute old GOES photo covered with a grease pencil analysis compared to the high resolution looping/analysis capability provided by MIDDS and five minute rapid scan data.

OPERATIONAL APPLICATION OF THE MIDDS

Examples of operational applications of the MIDDS are shown in Table 4. Although only available for a short time (system started as a remote terminal from SSEC in August 1984), the operational payoffs have been very significant.

TABLE 4
MIDDS APPLICATION TO RANGE OPERATIONS (15 Aug 84-
15 Oct 85)

<u>TEST/SYSTEM</u>	<u>MIDDS APPLICATION/RESULT</u>
Pershing II 3 Oct 84	METSAT loop and resolution indicated down range impact area clearing. Ten minute weatherhold. ARIA aircraft confirmed forecast. Test conducted successfully. Saved rescheduling costs.
STS-41G 5-13 Oct 84	MIDDS indicated RTLS clouds would remain thin and scattered variable broken. Launch conducted on time. Saved launch rescheduling costs.
STS-41G 5-13 Oct 84	MIDDS showed cloud cover would dissipate to acceptable level for EOM at KSC. Saved costs of Shuttle carrier operations.
STS-51A 8-16 Nov 84	MIDDS showed clouds would remain thin and scattered - broken for landing at KSC. EOM Recovery at KSC. Saved costs of Shuttle carrier aircraft operations.

STS-51C
24-27 Jan 85

MIDDS IR METSAT analysis used to monitor local temperature trends. Surface temperatures below freezing were impacting external tank operations. Minimized delays on launch operations. Saved costs of additional rescheduling.

TITAN
21 Dec 84

MIDDS showed clouds/showers moving north from south central Florida would slow and not reach the launch area. F-106 weather reconnaissance plane not required. Launch conducted on time. Saved cost of weather reconnaissance flight.

ATLAS-CENTAUR
INTELSAT-F10
9 Mar 85

MIDDS used to monitor development and track of low pressure system into SE United States. Launch was correctly delayed 24 hours based on weather forecast. Saved one day of additional range launch costs.

STS-51D
12-17 Apr 85

MIDDS showed area of precipitation moving to south of Pad 39-A. Launch conducted at end of window, saved rescheduling costs.

STS-51D
12-17 Apr 85

MIDDS and radar detected rain-cells moving in which would pass south of the Shuttle Landing Facility. MIDDS showed area of dry air moving in behind cells. EOM landing at KSC delayed one orbit to ensure safety of STS. Saved additional range costs of delaying extra day for EOM.

STS-51B
29 Apr-6 May 85

MIDDS streamline analysis capability used to assure launch officials that stratocumulus clouds over Melbourne and Orlando would not advect over RTLS. Prevented launch delay costs.

STS-51F
12 Jul 85
to abort

First Attempt

MIDDS 1km resolution satellite data used to track convective activity in FL and assure launch officials that thunderstorms would not affect first afternoon launch attempt.

STS-51F
29 Jul-6 Aug 85

Launch

Using MIDDS 1km satellite data and looping capability we were able to show launch officials weather would hold for launch period. Result: NASA extended opening of launch window to beginning of scientific window for maximum benefit of spacelab experiments.

STS-51I
27 Aug- 3 Sep 85

Scheduled 24 Aug but delayed due to weather on launch day. MIDDS used extensively to monitor and track severe weather associated with tropical wave. MIDDS corroborated radar data and tailored IR enhancements showed decreasing TRW tops. Shuttle was able to launch through a hole in the precipitation. Result: saved costly delays in rescheduling and recycling of external tank.

STS-51J
3-7 Oct 85

Easterly wave threatened launch, we were able to track its movement and dissipation, and we were able to show launch officials building cumulus fields (in rapid scan mode) and need for timely launch decision. Result: first flight of Atlantis on schedule.

FUTURE PLANS

Significant items planned for the MIDDS which should be in place within the next six months, and are shown on the operational system (Fig. 1) include the addition of radar and the National Meteorological Center's (NMC) product circuit. The radar data will include volumetric data using techniques developed by the McGill University radar group and will be patterned after their Short-Range Automated Radar Prediction (SHARP) system. This system will send Constant Altitude PPI (CAPPI) scans, arbitrary vertical slices, and short term forecasts of cell movement to the MIDDS from the WSR-74C radar.

The work station for the MIDDS is also being upgraded to a smart terminal with the IBM A/T as the nucleus. The software is designed with a "bottom-up" philosophy, allowing easy modification of the system for tailoring to locally unique data sets, local area weather peculiarities, and mission requirements.


The A. D. Little Company, Inc. has a six month contract with KSC for a "Weather Forecasting Expert System Evaluation and Feasibility". Results of this study are pending.

The Meteorological System Modernization Program (MSMP) is constantly reviewing current technology to assure both present and future requirements are met with the most modern methods possible.

SUMMARY

This paper has provided the background and progress to date of upgrading weather support technologies to meet the challenge of Space

OPERATIONAL SYSTEM*

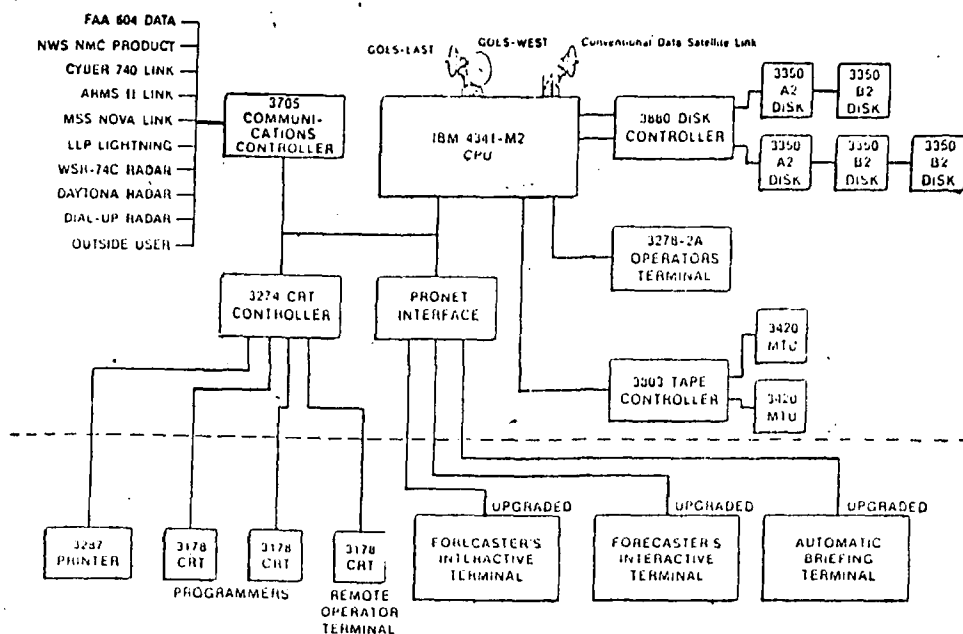

* Redundant spares not shown

Fig. 1 MIDS System Configuration

Shuttle support. As shown, the maturation of Shuttle hardware will result in an increased system schedule that can only be met by minimizing the impacts of weather delays on all facets of Shuttle operations. Applications to date clearly demonstrate the payoff of the MIDS system to range and Shuttle operational efficiency.

REFERENCES

- Boyd, B. F., T. M. Myers, and J. E. Erickson (1985): Modernization of Weather Support to the Space Transportation System. Preprints Second International Conference on the Aviation Weather System, Montreal, Amer. Meteor. Soc., 233-237.
- Erickson, J. E., B. F. Boyd, and J. W. Oliver (1985): Meteorological Interactive Data Display System (MIDS) Data Base. Preprints International Conference on Interactive Information and Processing Systems for Meteorology, Oceanography, and Hydrology, Los Angeles; Amer. Meteor. Soc., 173-175.
- Myers, T. M., and B. F. Boyd (1985): Status Report on the Upgrade of Weather Forecast Support to Shuttle Operations. Proceedings of the Twenty Second Space Congress, Cocoa Beach, FL, 7-45/7-49.
- Myers, T. M., and B. F. Boyd (1985): Status Report on the Application of the Meteorological Interactive Data Display System to Space Shuttle and Range Support at the Kennedy Space Center and Cape Canaveral. Preprints Conference on Aerospace and Range Meteorology, Huntsville, AL, Amer. Meteor. Soc., 73-80.
- NASA/KSC (1984): Request for Proposal RFP #10-2-0049-5 for the Weather Forecasting Expert System Study, John F. Kennedy Space Center.
- NASA/KSC (1985): Revision C Amendment 017 for Shuttle Launch Commit Criteria and Background.
- Oliver, J. W., and J. E. Erickson (1984): Meteorological and Interactive Data Display System. Proceedings Twenty First Space Congress, Cocoa Beach, FL, 6-15/6-18.
- Simoncic, A. A. (1983): Weather Support to the Space Transportation System. Preprints Ninth Conference on Aerospace and Aeronautical Meteorology, Omaha, NE, Amer. Meteor. Soc.

END

FILMED

2-86

DTIC